


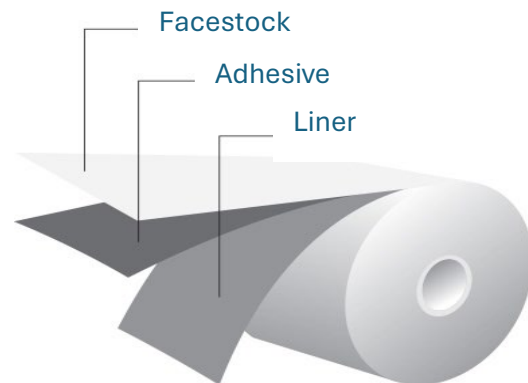


WHITE GLOSS BOPP 60µm	
ACRYLIC EMULSION TA1	
CLEAR PET 30µm	



### Description

The white gloss BOPP face film is coated for conventional printing like flexography, offset, screen printing. The emulsion acrylic glue TA1 is good for general application including label for beauty, home & personal care products, beverage, logistics, etc.

### Facestock

Top Coated White Glossy BOPP

Caliper (µm) ISO 534	60 (± 5%)
Weight (g/m <sup>2</sup> ) ISO 536	49.2 (± 5%)
Finish (gloss level @60°)	≥ 90

### Adhesive

Emulsion Acrylic

Caliper (µm)	19 (± 1)
Initial Tack (N/in) FTM 9 (Glass)	≥ 9
90° Peel Adhesion (N/in) FTM 2 (Steel)	≥ 6
Shear 9.8N/in <sup>2</sup> (hours) FTM 3	≥ 15
Minimum Application Temperature (°C)	5
Service Temperature (°C)	-20 to 80

### Liner

Clear Polyester Film.

Caliper (µm) ISO 534	30 (± 4%)
Release Force (gf)	15 to 35

### Storage Information

Must be stored at temperature of 23 (±2) °C and humidity 50 (±5) %.

### Printing Processes

Flexo / Letter Press (Y), Offset (Y), Screen Off (Y), Thermal Transfer (test before print), Direct Thermal (N), UV Inkjet (test before print), Laser Jet / Dry Toner (Y), HP Indigo (works on roll-to-roll indigo machine with pre-coating).